
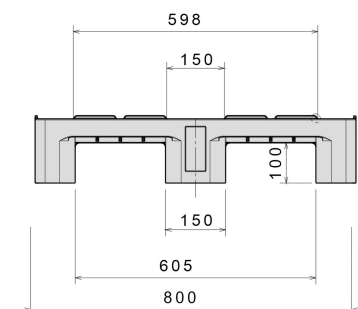


## H1 ESD

1200 x 800 mm

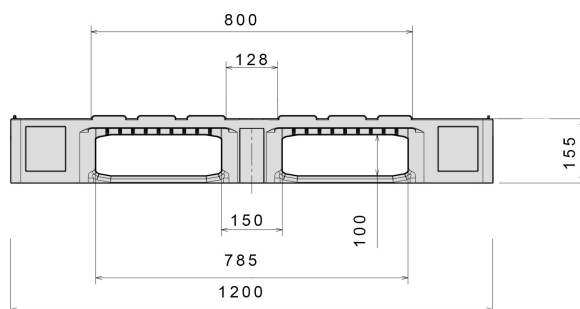

Art. no. 83102222

### Technical data

Dimensions L x W x H (mm) 1200 x 800 x 160

Weight (kg) 17.5

Material PE, Leitfähig

Load capacity (kg)



**Static**  
5000 kg



**Dynamic**  
1000



**In Racking System**  
850

### Characteristics

Colour: black

Runners: 3, unwelded

Rims: 7 mm

Temperature stability: -30 °C to +40 °C, briefly up to +90 °C

ESD pallet

Surface resistance of  $\geq 1 \times 10^4$  Ohm to  $< 1 \times 10^{11}$  Ohm

### Options

Rim options

### Loading quantities (Pcs / Approximate amount)



**Container**

Container 20': **192**  
Container 40': **390**

Container 40' High Cube: **440**  
Conventional trailer 45' high cube container: **510**



**Truck**

MEGA-Trailer: **594**

Jumbo: **684**

### Labelling

Customised printing and numbering available on request depending on quantity. Position upon consultation.



\*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

\*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.

\*3 Static load: resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20 °C.

Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 20 °C.

In racking system: evenly distributed load (E2 boxes or euro fish boxes) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 20 °C.